

**LIFETIME**

LAWN & GARDEN

MODEL N° 65009

**OWNER'S MANUAL**

Keep the Identification Number in case you need to contact our Customer Service Department.

## REGISTER YOUR LIFETIME PRODUCT TODAY!

There are benefits to registering your Lifetime product. We are now adding product registration to ours. It's fast and easy! Register with us at [www.Lifetime.com](http://www.Lifetime.com) and enjoy these great benefits:

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as HEW product introductions and special discount promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished, but you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

### LIFETIME'S PROMISE TO YOU

Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at [www.Lifetime.com](http://www.Lifetime.com)

**REGISTER today!**

### **\*\*U.S. and Canada customers ONLY\*\***

IF ASSISTANCE IS NEEDED,

## **DO NOT CONTACT THE STORE!**

**CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 275-3865**

Hours: 7:00 a.m. to 5:00 p.m. (Eastern Time) Monday through Friday (excluding holidays)

\*\*Call or visit our Web site for Saturday hours\*\*

**\*\*For customers outside the U.S. or Canada, please contact the store for assistance.\*\***



## SAFETY INSTRUCTIONS



### **FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.**

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check online box and include all required material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.


- Do not use in special areas such as grills, barbecues, welding equipment, etc. near the product.
- Two people are needed for assembly. It is also recommended that a third adult function as an instruction reader.

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.

## BEFORE BEGINNING ASSEMBLY



Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.

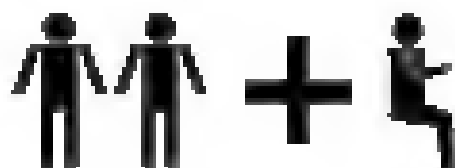

***\*Two adults required to complete assembly\****

*(+ one adult suggested as an instruction reader)*

**Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.**



## TOOLS REQUIRED FOR THIS ASSEMBLY

Flat Screwdriver



(x1)

Needle-Nose Pliers



(x1)

Socket Wrench  
w/1/8" Socket



(x1)

1/2" Wrench



(x1)

1/2" Wrench



(x2)

Safety Glasses



(1 pair for each person)

## ASSEMBLY GUIDES

*Refer to the following areas throughout the instructions  
to assist in the assembly process:*


This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.



This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.



This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.



These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.



## PARTS & HARDWARE LIST

#	Description	Quantity	✓	#	Description	Quantity	✓
<b>Main Parts</b>				<b>Full-to-Full-Frame Assembly Hardware</b>			
AWJ	Roll	1	<input type="checkbox"/>	AWP	5/16" Flat Washer	10	<input type="checkbox"/>
AWK1	Wheel	2	<input type="checkbox"/>	AWV	5/16" x 1" Round Soften Bolt	12	<input type="checkbox"/>
<b>SLT 65000 Metal Parts Kit</b>				AWW	5/16" Lock Washer	12	<input type="checkbox"/>
AWR	Arm	1	<input type="checkbox"/>	AWX	5/16" Threaded Hex Nut	12	<input type="checkbox"/>
AWL	Handle Bars	1	<input type="checkbox"/>	AWY	Lock Spring	1	<input type="checkbox"/>
AWM	Side Weldment	1	<input type="checkbox"/>	AAA	3/8" Nylock Nut	2	<input type="checkbox"/>
AWN	A-Framo	1	<input type="checkbox"/>	AWB	3/8" x 1 1/2" Spacer	2	<input type="checkbox"/>
AWO	Tongue	1	<input type="checkbox"/>	AWC	3/8" Flange Flat Washer	2	<input type="checkbox"/>
<b>SLT 65000 Steel Metal Parts Kit</b>				ABE	3/8" x 4" Hex Head Bolt	1	<input type="checkbox"/>
BJH	Tongue Mounting Bracket	1	<input type="checkbox"/>	AWD	Threaded Knob	1	<input type="checkbox"/>
AWA	Lock Bracket	1	<input type="checkbox"/>	AWE	3/8" x 5" Camage Bolt	1	<input type="checkbox"/>
AWP	Wheel Spacing Bracket	2	<input type="checkbox"/>	BJX	3/8" x 4 1/4" Hex Head Bolt	1	<input type="checkbox"/>
AWZ	Adjust Handle	1	<input type="checkbox"/>	<b>SLT Handle Bar-to-Tongue Assembly Hardware</b>			
AWT	Backing Plate	1	<input type="checkbox"/>	AWG	3/8" x 5" Hex Head Bolt	1	<input type="checkbox"/>
<b>SLT 65000 Ford Cart Hardware</b>				AWH	3/8" x 5" Camage Bolt	1	<input type="checkbox"/>
<b>SLT Side-Frame Assembly Hardware</b>				AAA	3/8" Nylock Nut	1	<input type="checkbox"/>
AWQ	Retainer Ring	2	<input type="checkbox"/>	AWH	Handle Bar Spacer	2	<input type="checkbox"/>
AWR	5/8" Nylon Insert Nut	8	<input type="checkbox"/>	AWI	Clamp Pin	1	<input type="checkbox"/>
AWS	5/8" x 1 1/2" U-Bolt	4	<input type="checkbox"/>	AWI	Cotter Key	1	<input type="checkbox"/>
AWT	U-Bolt Mounting Plate	2	<input type="checkbox"/>	AWD	Threaded Knob	1	<input type="checkbox"/>


## HARDWARE IDENTIFIER

### WHEELFRAME ASSEMBLY HARDWARE (SLT)


Hardware is actual size (Unless indicated otherwise)




**AWQ (x2)**  
Retainer Ring



**AWR (x8)**  
1/4" Nylon Insert Nut

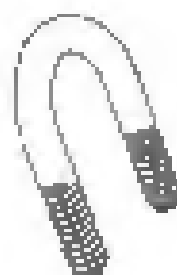

**AWS (x4)**  
1/4" x 1 1/2" U-Bolt

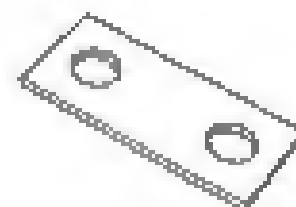

**AWT (x2)**  
U-Bolt Mounting Plate

### Full-to-Full-Frame Assembly Hardware (SLT)


Hardware is actual size (Unless indicated otherwise)



**AWP (x10)**  
5/16" Flat Washer



**AWV (x12)**  
5/16" x 1" Round Soften Bolt

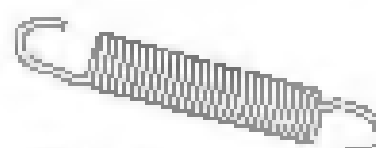

**AWY (x1)**  
Lock Spring



**AWW (x12)**  
5/16" Lock Washer



**AWX (x12)**  
5/16" Threaded Hex Nut

## HARDWARE IDENTIFIER

### TOP-TO-BOTTOM FRAME ASSEMBLY HARDWARE LIST (CONTINUED)

Hardware is actual size (Unless indicated otherwise\*)




**NA6 (x2)**  
3/8" Nylock Nut



**AW6 (x2)**  
3/8" Plastic Flat Washer




**AB6 (x3)**  
3/8" x 4" Hex Head Bolt

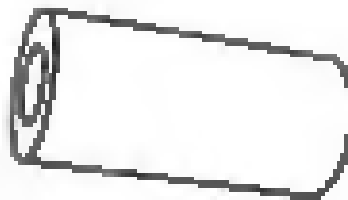

**AS6 (x2)**  
3/8" x 1 1/2" Spacer



**ABE (x5)**  
3/8" x 5" CamLag Bolt



**AK6 (x1)**  
Threaded Knob



**AB1 (x3)**  
3/8" x 4 1/8" Hex Head Bolt

### HANDLE BARS-TO-TOWERS ASSEMBLY HARDWARE LIST

Hardware is actual size




**AB6 (x1)**  
3/8" x 5" Hex Head Bolt



**NA6 (x1)**  
3/8" Nylock Nut



**ABE (x2)**  
3/8" x 5" CamLag Bolt



**AW6 (x2)**  
Handle Bar Spacer



**AK1 (x1)**  
Cotter Key



**DP1 (x1)**  
Davis Pin




**AK6 (x1)**  
Threaded Knob


## PARTS IDENTIFIER

### MAIN PARTS

Parts are 5% of actual size

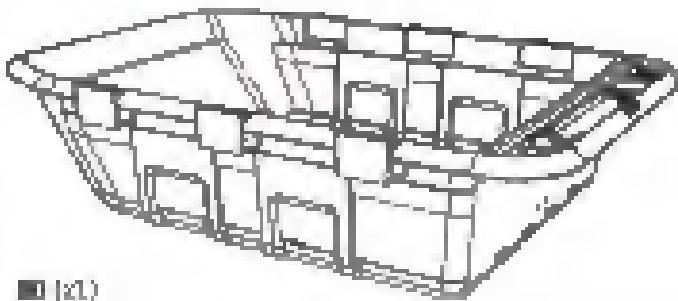


**001** (x1)  
Tub




**002** (x2)  
Wheel

### MAIN METAL PARTS KIT (KIT)

Parts are 5% of actual size (Unless indicated otherwise\*)

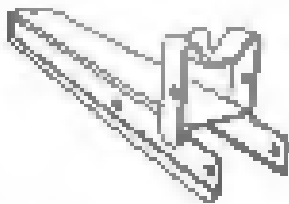

**003** (x1)  
Axle Mountment

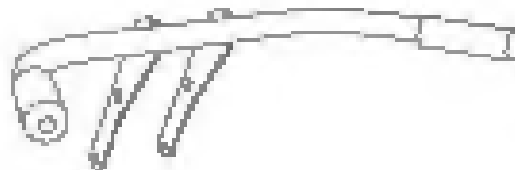

**004** (x1)  
Handle Bars



**005** (x1)  
Trimmer




**006** (x1)  
A-Frame




**007** (x1)  
Axle

### SMALL METAL PARTS KIT (KIT)


Parts are 5% of actual size (Unless indicated otherwise\*)




**008** (x1)  
Tongue Mounting Bracket

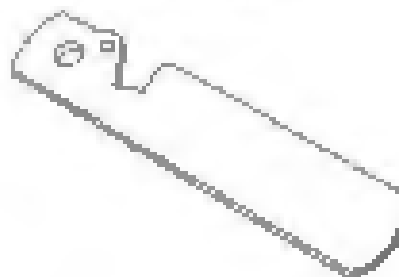

**009** (x1)  
Latch Handle

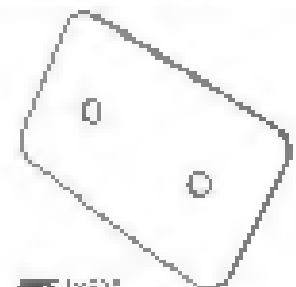

**010** (x3)  
Backing Plate

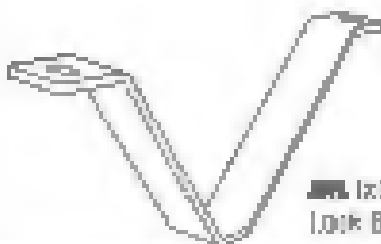

**011** (x1)  
Lock Bracket



**012** (x2)  
Wheel Spacing Bracket

# AXLE/FRAME ASSEMBLY

## HARDWARE REQUIRED


Hardware is shown as 3/16" (Unless indicated otherwise)\*




**RR (x2)**  
Retainer Ring



**NR (x8)**  
1/4" Nylon Insert Nut

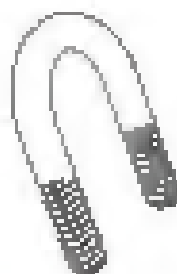


**UB (x4)\***  
1/4" x 1 1/2" U-Bolt

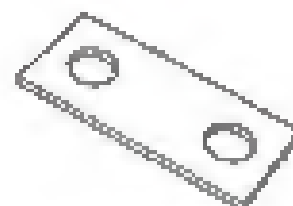

**UP (x2)\***  
U-Bolt Mounting Plate

## METAL PARTS REQUIRED

Parts are 5% of actual size (Unless indicated otherwise)

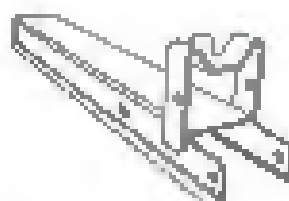


**FW (x1)**  
Face Workman



**AF (x1)**  
A-Frigit




**AX (x1)**  
Axle

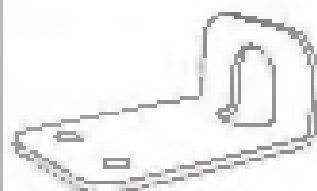

**WS (x2)\***  
Wheel Spacing Bracket

## OTHER PARTS REQUIRED

Parts are 5% of actual size (Unless indicated otherwise)



**WL (x2)**  
Wheel

## TOOLS REQUIRED



**SW**  
Socket Wrench



**NP**  
Needle-Nose Pliers



**SG**  
Safety Glasses



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



SEC

1




SEC

1.1

### AXLE/FRAME ASSEMBLY



Insert **Axis (100)** through **Axis Mounting (101)** and slide one **Wheel Spacing Bracket (102)** over each end of **Axis** as shown.

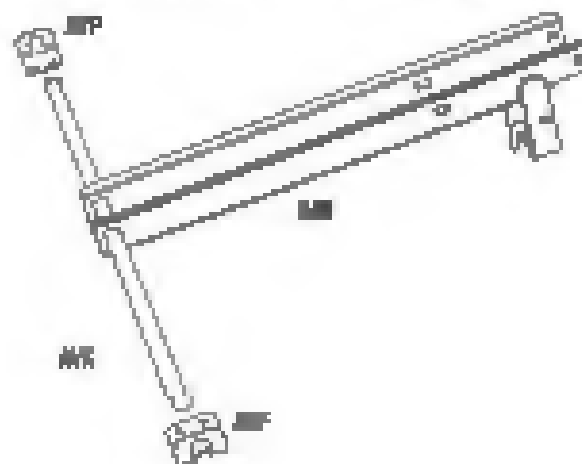

SEC

1.2

Place **Axis/Frame Mounting Assembly** over **4-Frame (103)** as shown. Slide a **Wheel (104)** over the **Axis**. And use a pair of needle-nose pliers to secure the **Wheel** to the **Axis** with the **Retainer Ring (105)** in the grooves of the ends of the **Axis**.

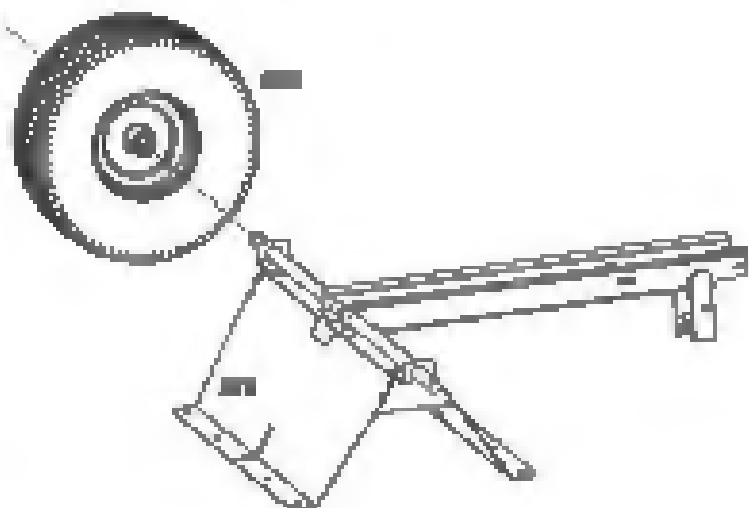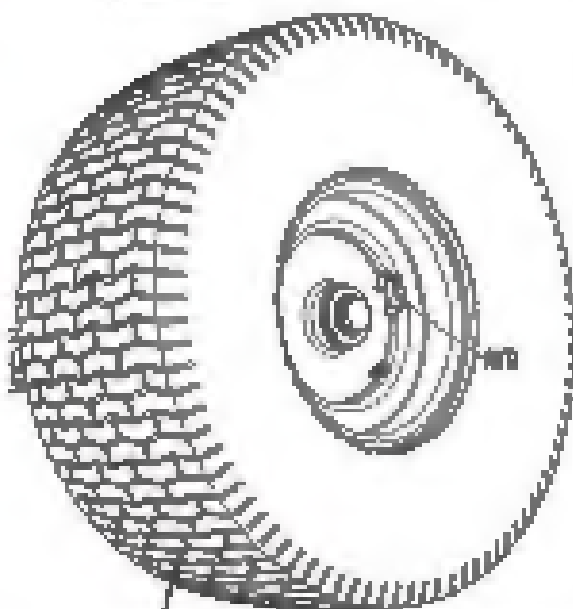

**Note:** The rubber foot grips resting the outside of the **Cartage Box**.



# TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"


1/2"



3/16" (x3)



1/4" (x4)



3/8" (x3)





1/4" x 2"



## SEC

## 1.3

Repeat Step 1.2 for second Wheel.

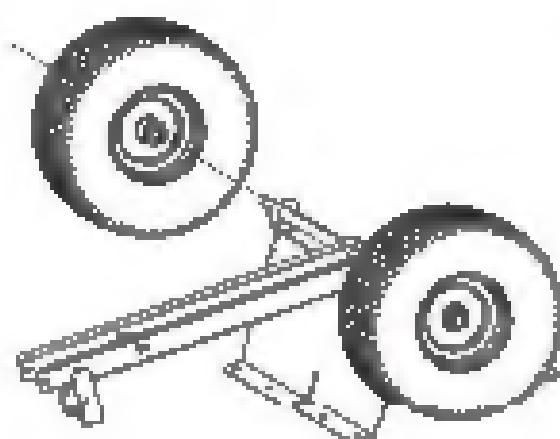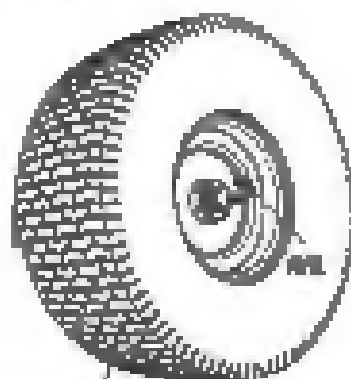


**Note:** You may need to push on the other end of the Axle to ensure the grooves at the other end of the Axle. Since the bearings don't double, it is not necessary to grease the bearings using the grease fitting.

## SEC

## 1.4

Center the Axle on the A-Frame. Insert four (4) 1/4" x 1 1/2" B-Rolls (BR2) over the Axle and through the holes in the End Brackets, A-Frame, and the two (2) 3/8" Roll Mounting Plates (RM1). Secure with eight (8) 1/4" Nylon Insert Nuts (NIN).

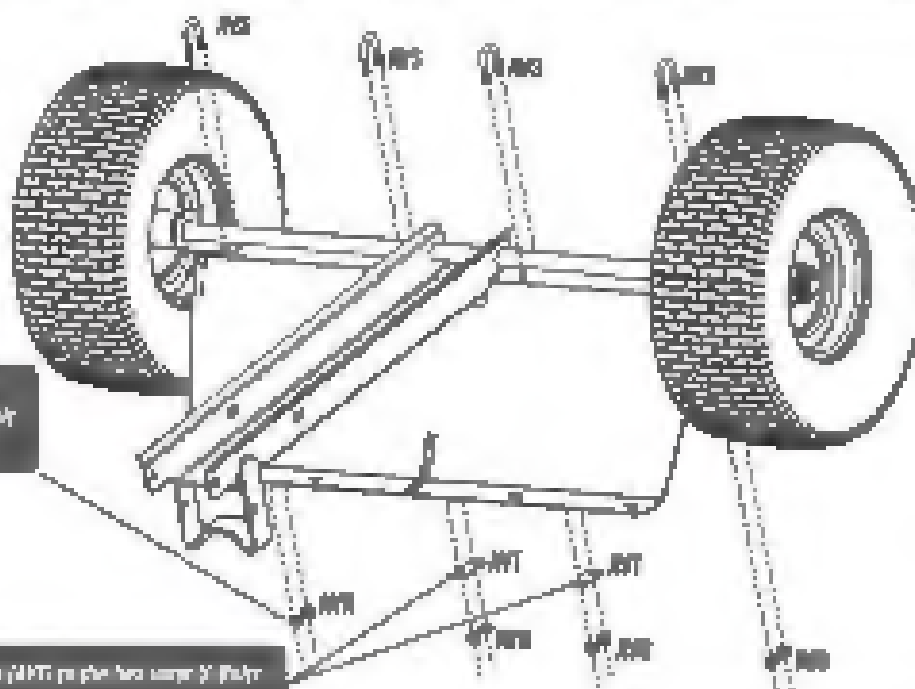

**Note:** To avoid damaging the A-Frame, ensure you tighten all Nuts (NIN) evenly over each B-Roll (BR2).

**Note:** Attach the two (2) 3/8" Roll Mounting Plates (RM1) to the two lower B-Rolls.

## 2 TUB-TO-AXLE/FRAME ASSEMBLY

### HARDWARE REQUIRED

Hardware is provided in the kit. Items in parentheses are not included.



**MB (x3)**  
3/8" x 4 1/2" Hex Head Bolt




**MB (x12)**  
5/16" x 1" Round Saddle Bolt



**MB (x1)**  
3/8" x 4" Hex Head Bolt



**MB (x12)**  
5/16" Threaded Hex Nut

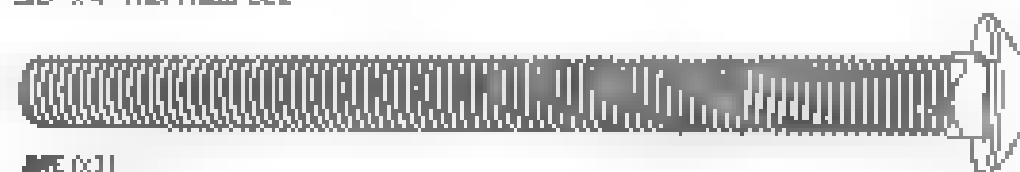

**MB (x1)**  
3/8" x 5" Collage Bolt



**MB (x10)**  
5/16" Flat Washer




**MB (x12)**  
5/16" Lock Washer




**MB (x12)**  
3/8" Plastic Flat Washer



**MB (x12)**  
3/8" Nylock Nut

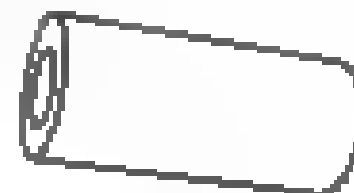

**MB (x2)**  
3/8" x 1 1/2" Spacer

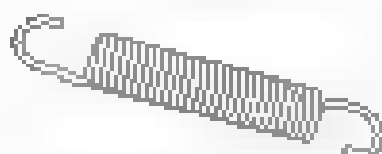

**MB (x1)**  
Leaf Spring



**MB (x1)**  
Threaded Knob

## 2 TUB-TO-AXLE/FRAME ASSEMBLY

### METAL PARTS REQUIRED


2. Part is 5% of actual size (Dimensions in parentheses)



**MM (xL)**  
Tongue




**MM (xL)**  
Tongue Mounting Bracket

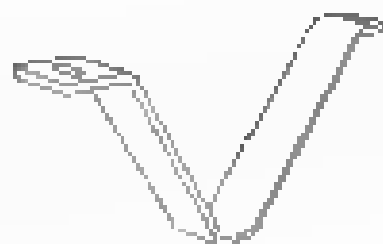

**MM (xL)**  
Lock Bracket




**MM (xL)**  
Latch Handle

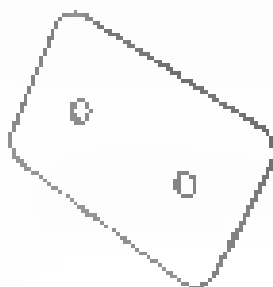

**MM (xL)**  
Backing Plate

### PLASTIC PARTS REQUIRED

Part is 5% of actual size

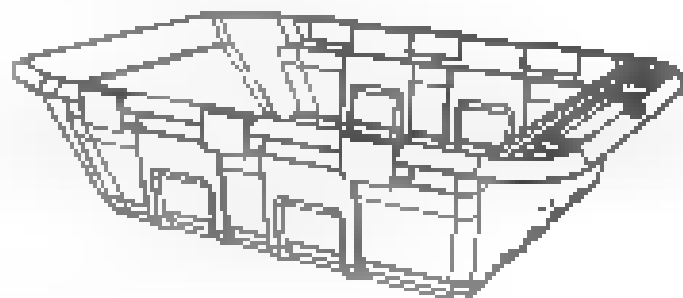


**MM (xL)**  
Tub

### TOOLS REQUIRED



Phillips Screwdriver



**3/16"** Wrench (x2)



**1/2"** Wrench



Needle-Nosed Pliers



Safety Glasses



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



W8 (x8)



W5 (x5)




TR5 (x8)



N5 (x5)

SEC 2

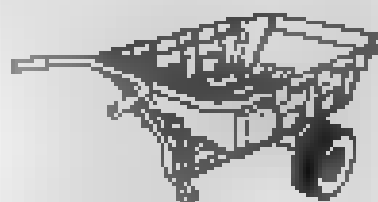

7


## TWO ADULTS REQUIRED FOR THIS STEP

SEC

3.1

### TUB-TO-FRAME ASSEMBLY

Turn Tub (A01) on its side and place A-Frame Assembly against Tub as shown. Secure A-Frame Assembly to Tub using eight (8) 1/16" x 1" Round Stainless Bolts (W8), eight (8) 1/16" Flat Washers (W5), eight (8) 1/16" Lock Washers (W9), and eight (8) 5/16" Threaded Rod Bolts (TR5).

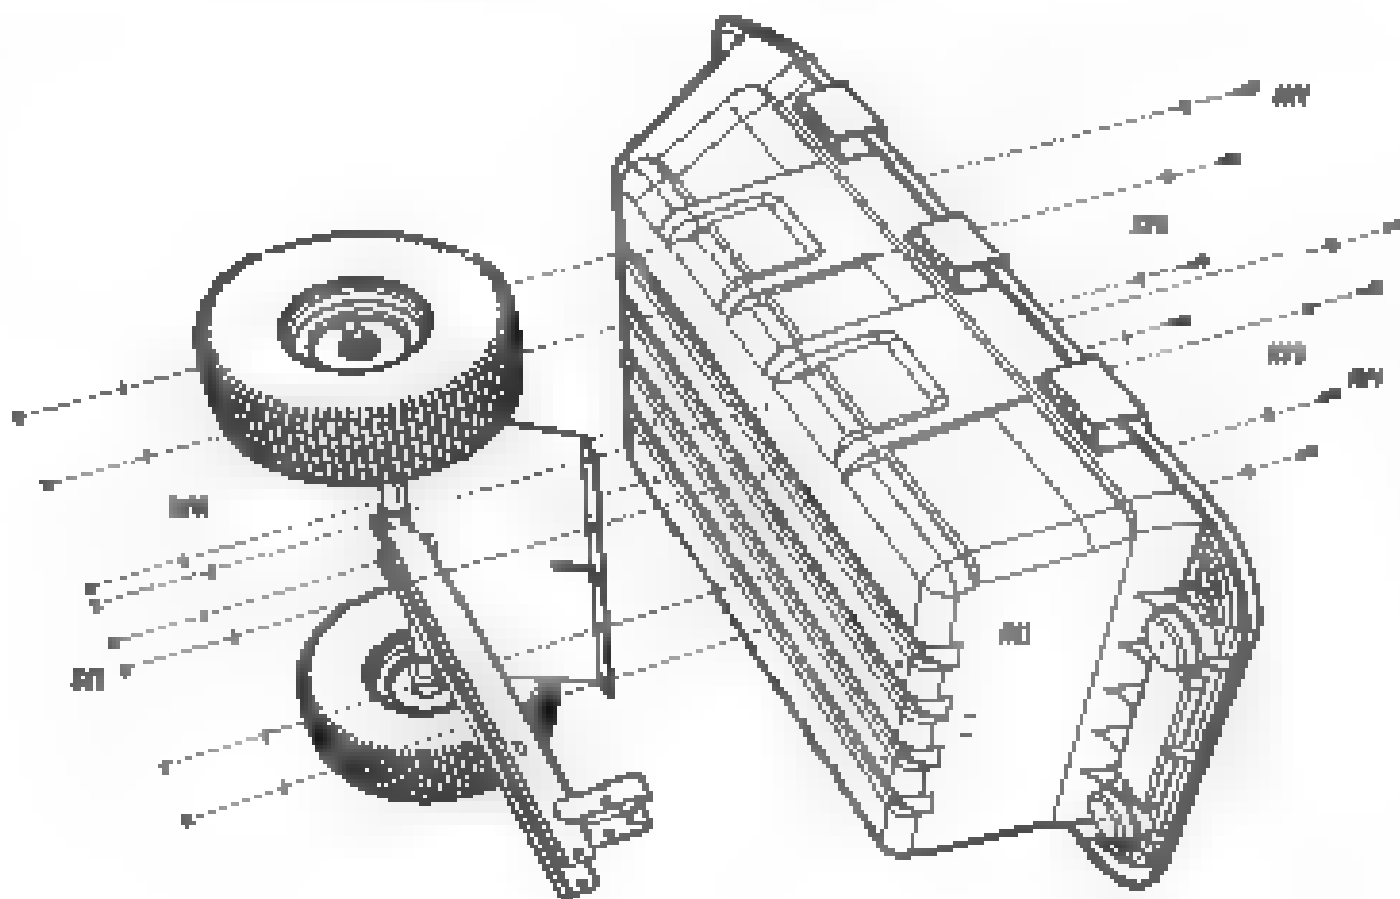



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

2



MMU (x2)



MMV (x2)




MMI (x2)



MMW (x2)

SEC


2

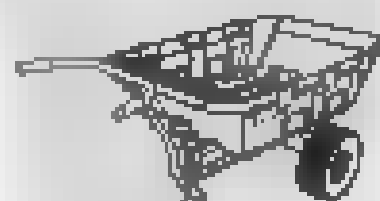

SEC

77

Ridge the Air-Weapon away from the Tub. Place the Lock Bracket (MMU) over the two holes towards the front of the bottom of the Tub as shown. Lightly secure with two (2) 5/16" x 1" Round Shaped Bolts (MMV) two (2) 5/16" Flat Washers (MMW) two (2) 5/16" Lock Washers (MMW), and two (2) 5/16" Threaded Box Nuts (MMI).

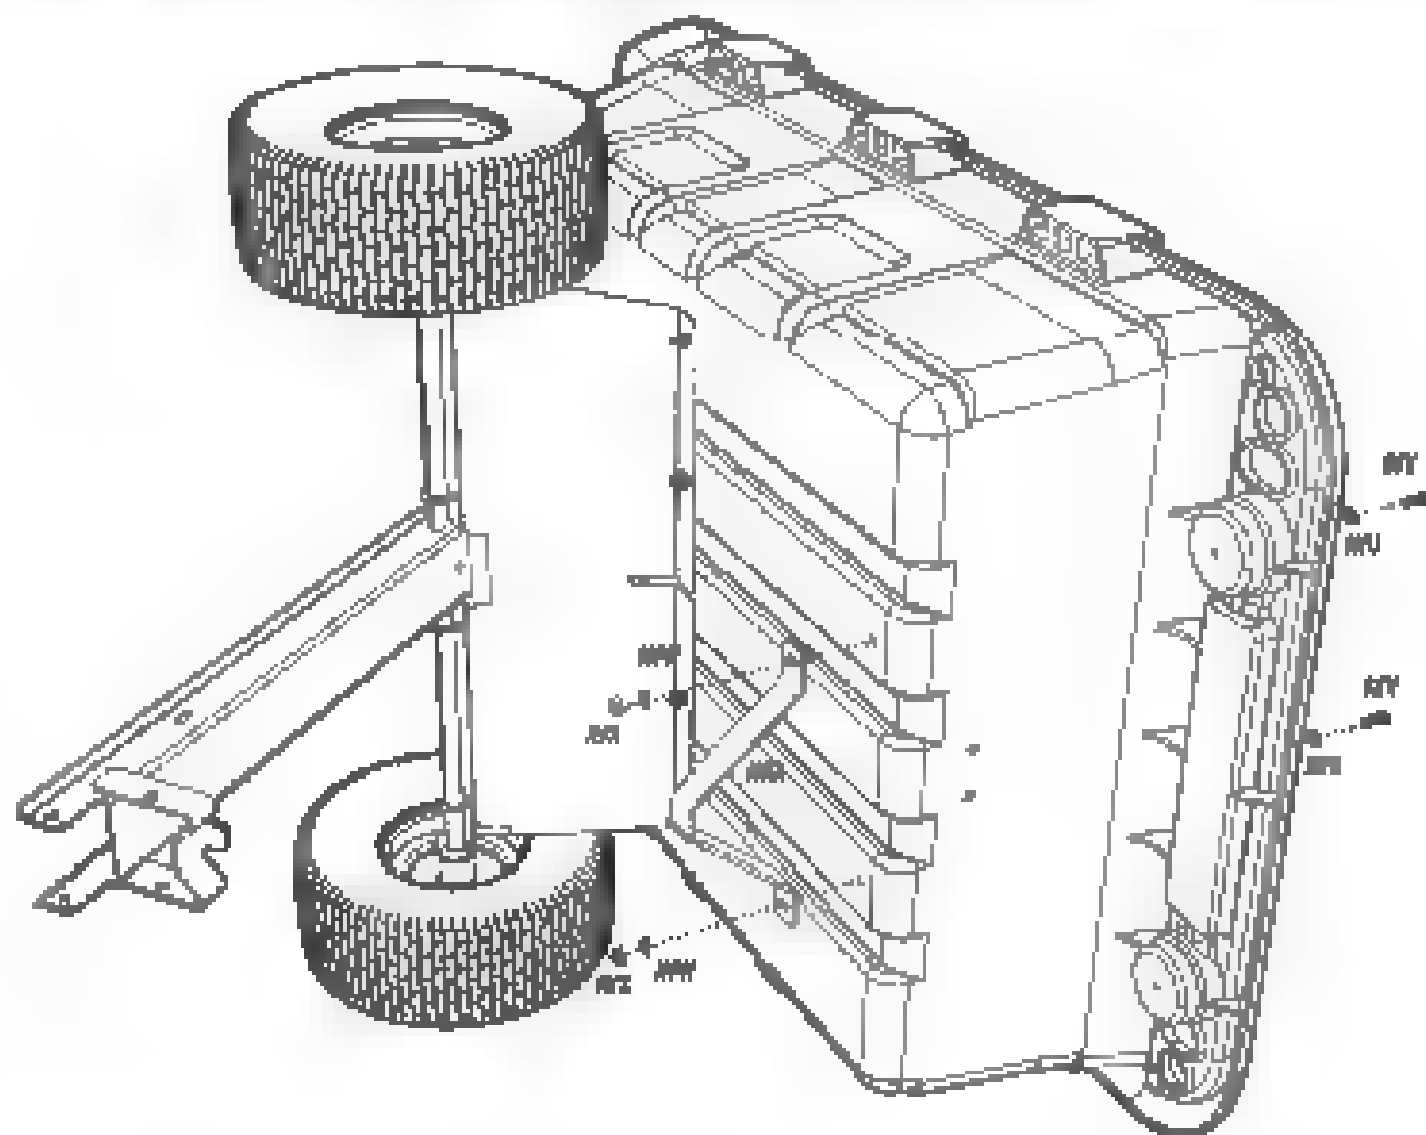




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC

2

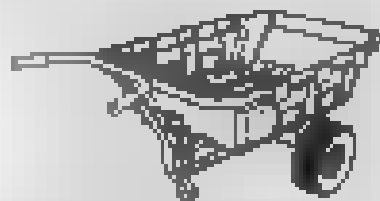

7


1/4"

NO HARDWARE REQUIRED FOR THIS STEP

SEC

2.3

Turn the Auto Welder until its flange sits against the Lock Bracket. Reposition the Lock Bracket if necessary. Tighten the 1/4" threaded pin (HW1).

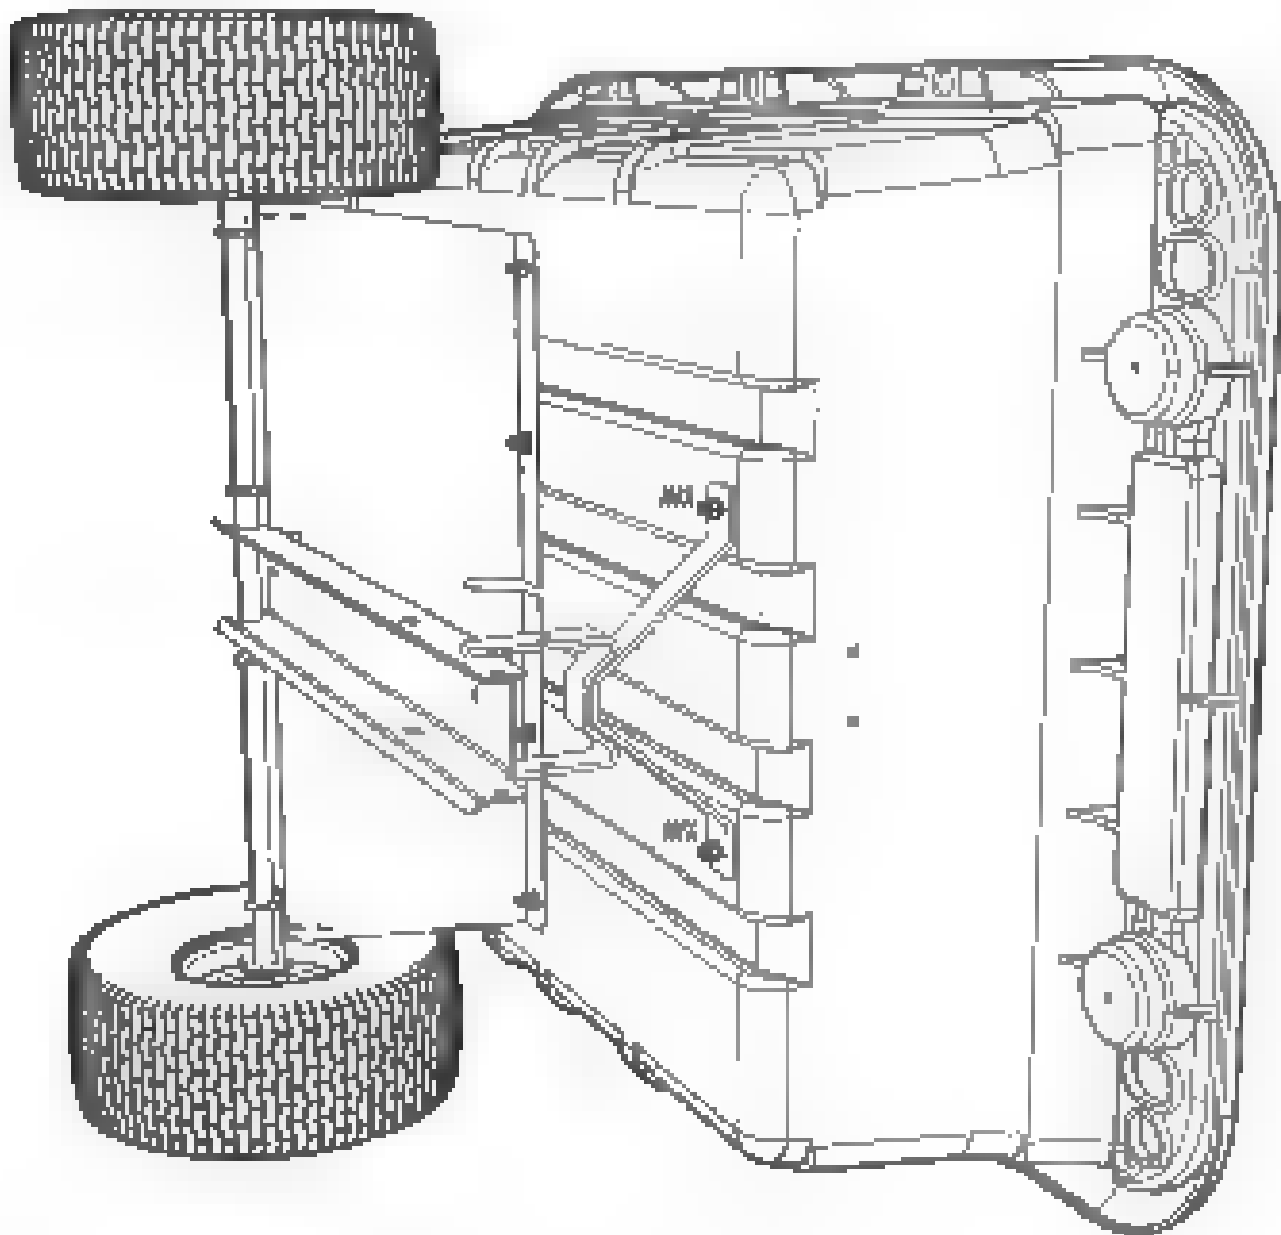



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC

2


2



WT (x3)





WT (x1)

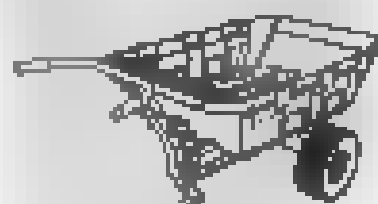

SEC

2.4


Insert the Load Spring (WT) in the hole at the end of the Axle Wedgment and through the hole in the Load Handle (WT).

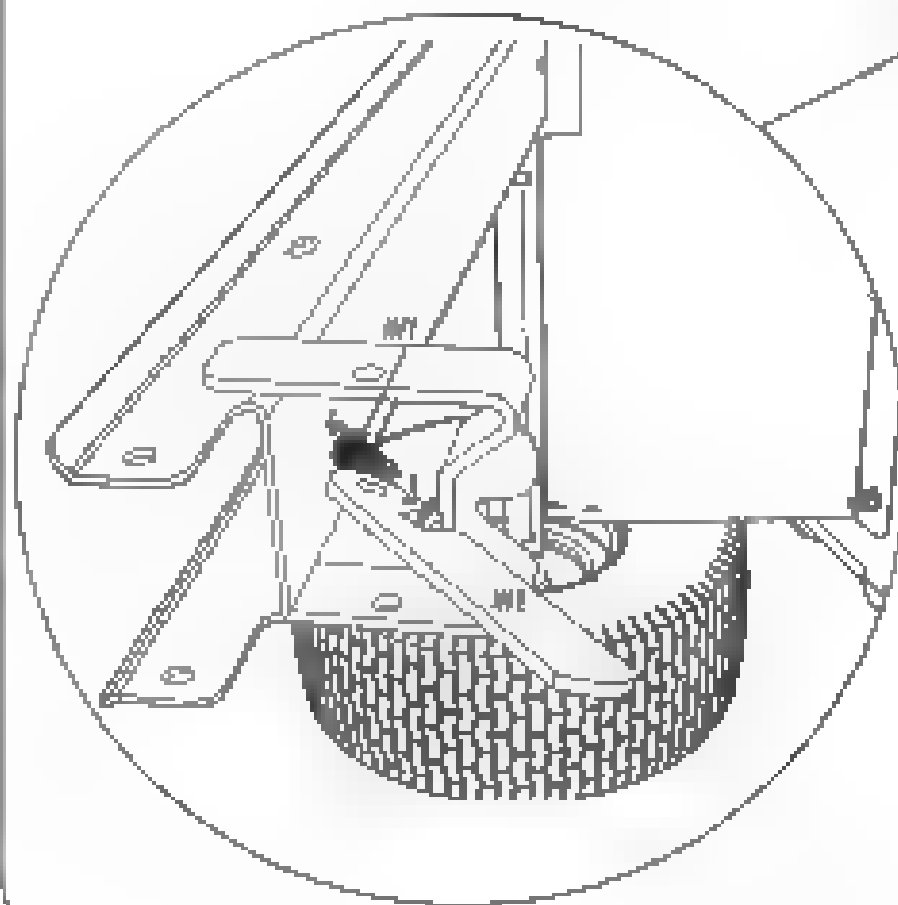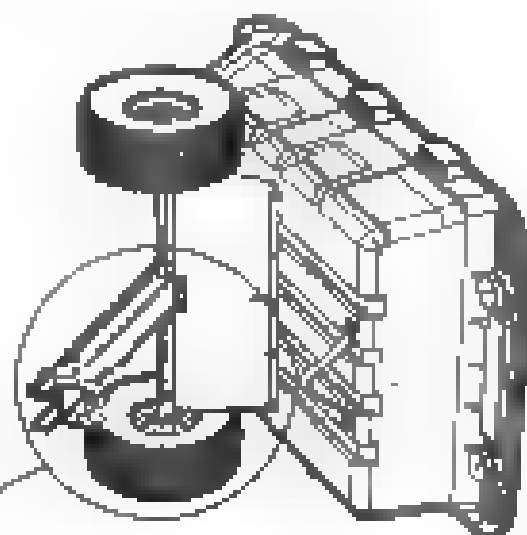




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

2-1/2" x 3/4" x 1/2" (x2)  
New Thread Bolt (1850) and  
Washer with one (1) 3/4" Nylock Nut (1840)

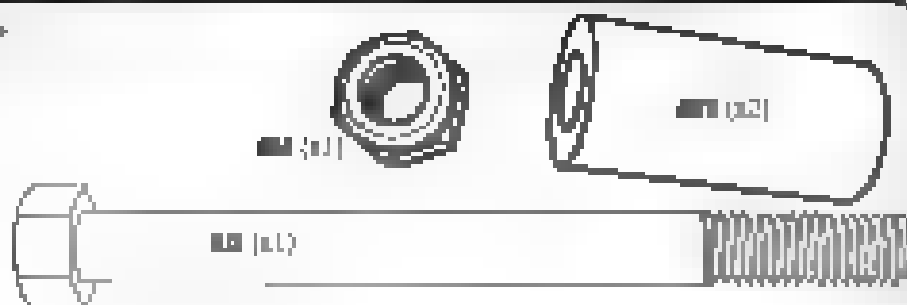

SEC 2

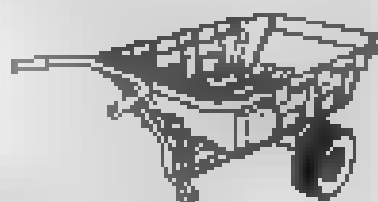


7

SEC

2.5

Insert one (1) 2-1/2" x 3/4" x 1/2" Bolt (1850) on each side of the Latch Handle as shown. Insert one (1) 3/4" x 4 1/4" New Thread Bolt (1850) and secure with one (1) 3/4" Nylock Nut (1840)

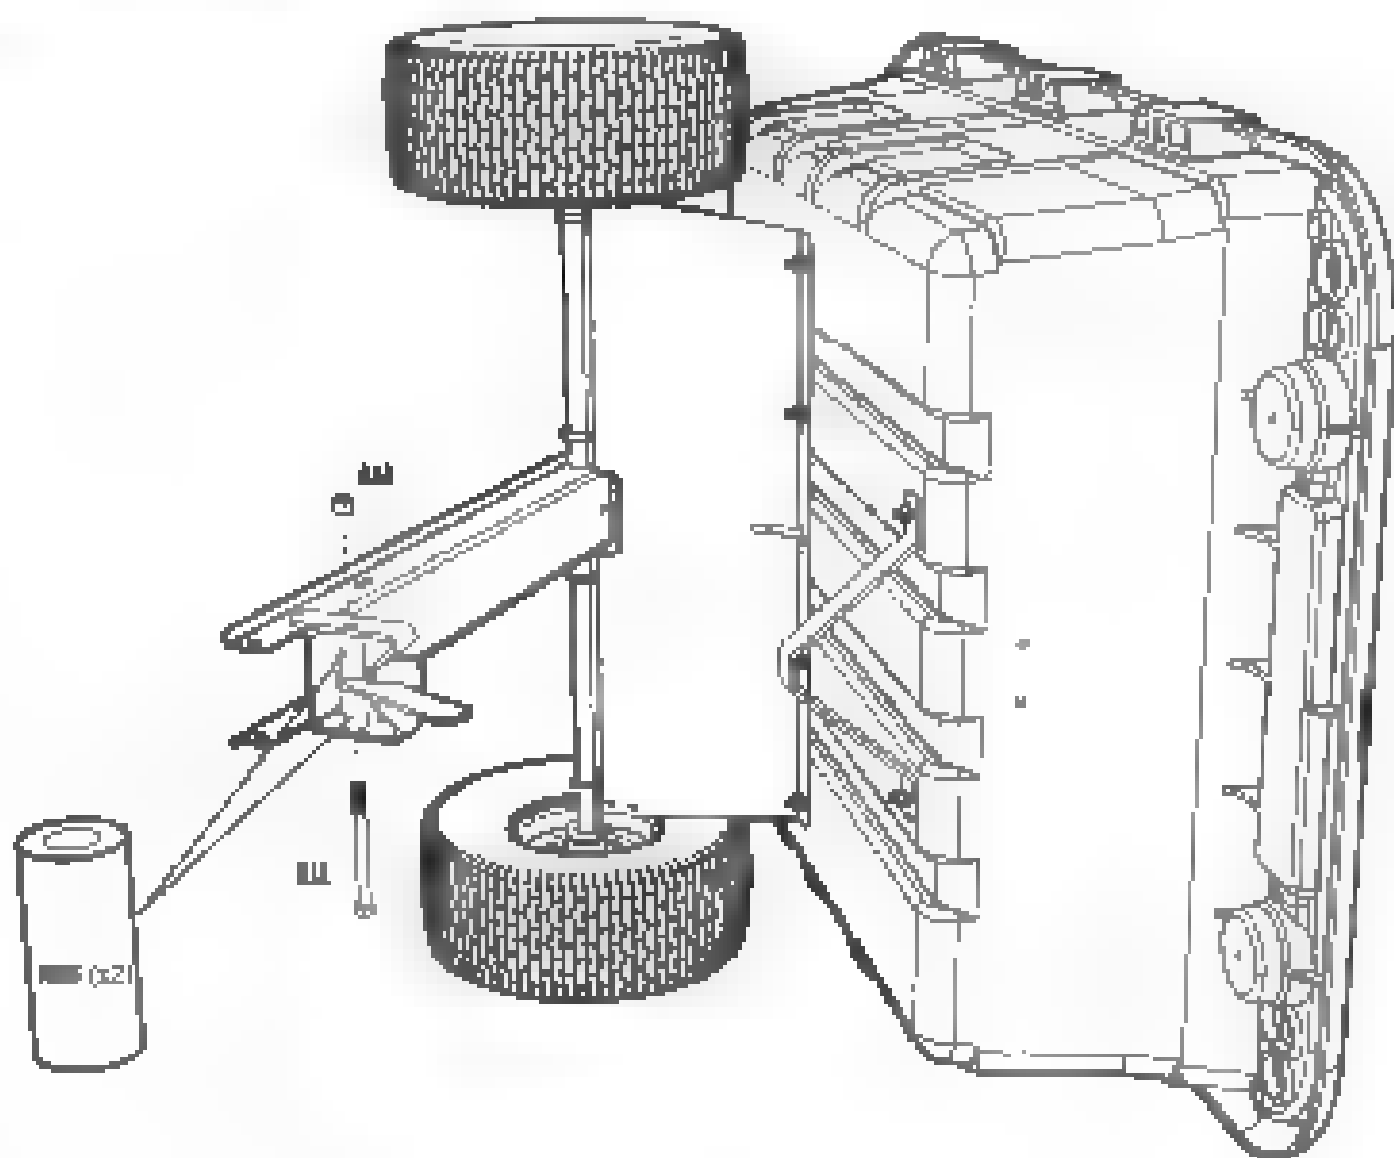



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC

2

3

1/11" (x2)


1/11" (x2)




MPC (x2)



MPC (x2)

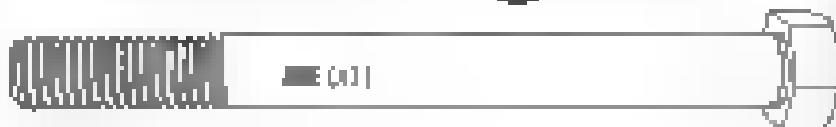


MSE (x1)

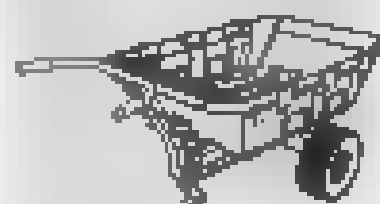

SEC


7.6

**Turn Turn Cart Assembly (M4)** Place the **Tongue (M4)** between the boxes of the **End of the Axle Weldment** (as shown). Insert one (1) **1/11" Plastic Flange Washer (MPC)** on each side of the **Tongue** (between the boxes of the **Axle Weldment**). Secure the **Tongue** with one (1) **3/11" x 4" Blue Steel Rod (MSE)** and one (1) **3/11" Nylock Nut (MNS)**.

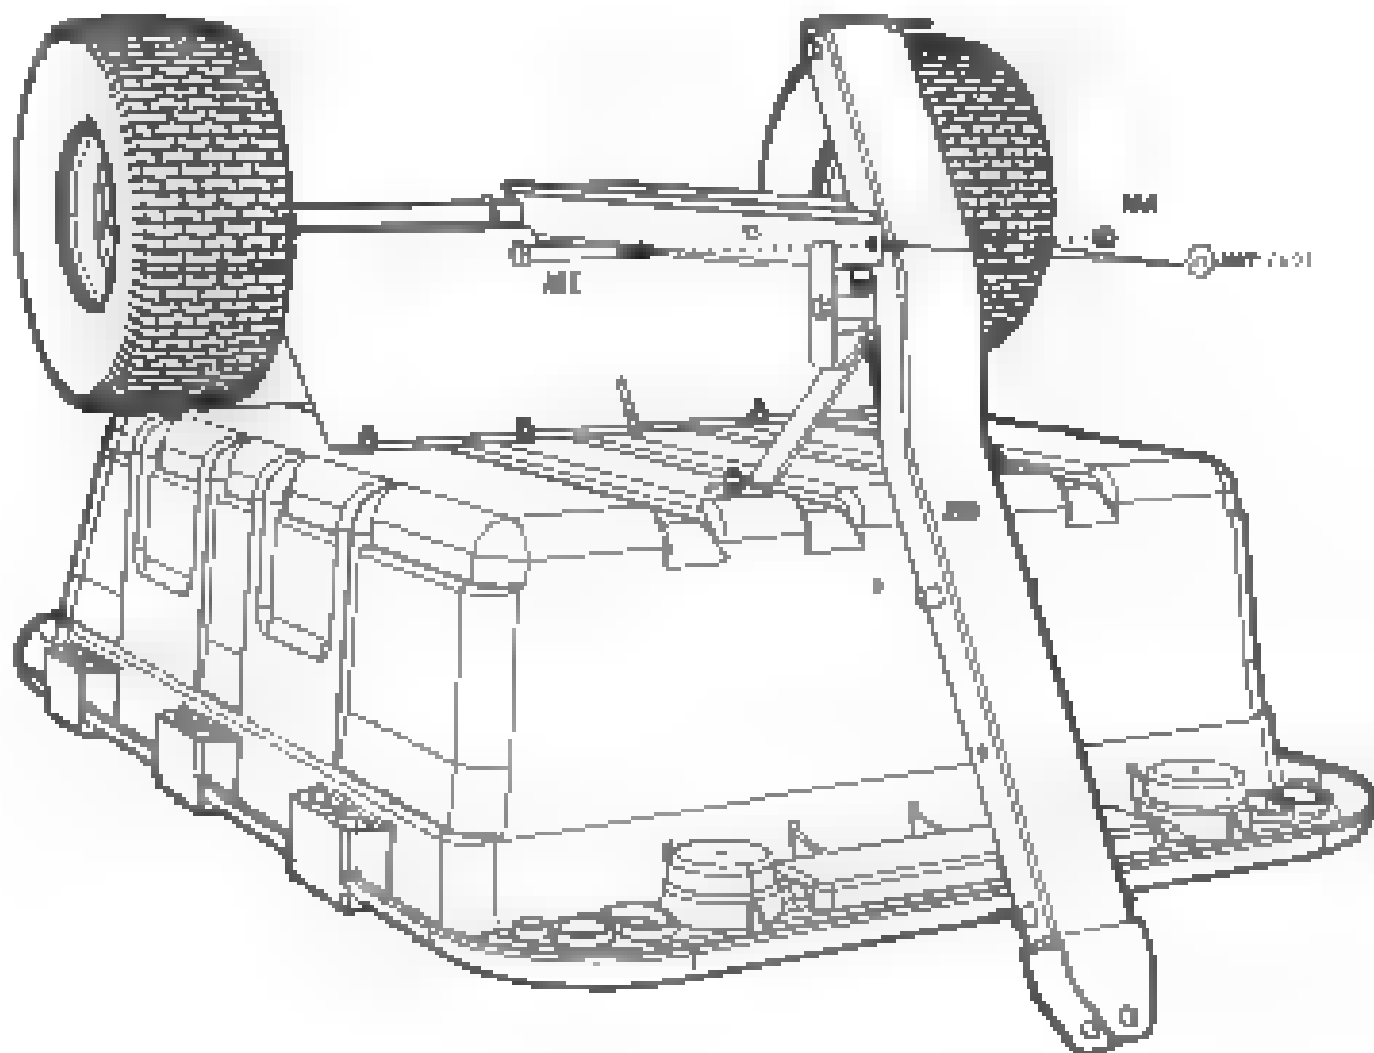




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

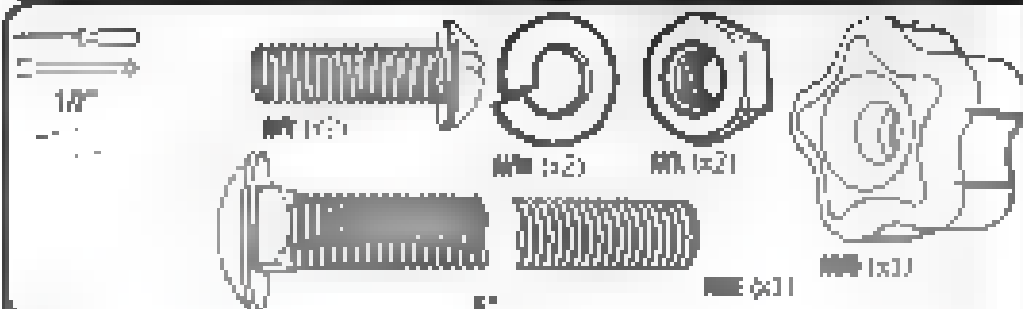


SEC 2

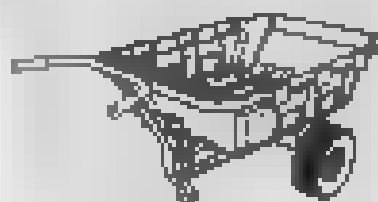

SEC

2.7

**Turn Yard Cart Upright:** On the inside of the Tub, place the **Backing Plate (100)** over the two holes towards the middle of the Tub and insert two (2) **5/16" x 1" Round Shaped Bolt (101)** through the holes. Place the **Spring Mounting Bracket (102)** over the Bails and secure with two (2) **5/16" Lock Washers (103)**, and two (2) **5/16" Threaded Nut (104)**.

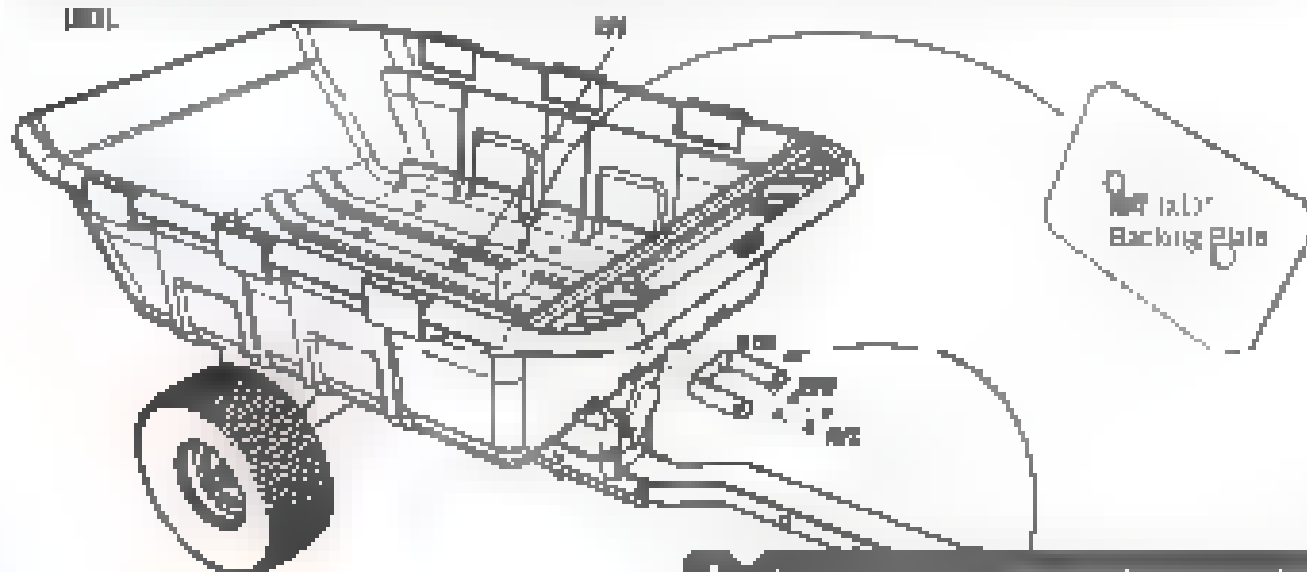


Make sure the angle of the ends of the Tongue Mounting Bracket.

SEC

2.8

**Rotate the Tongue upwards and insert one (1) 3/8" x 1" Cornscrew Bolt (105) through the Tongue Mounting Bracket and Tongue and secure with one (1) Threaded Nut (106).**

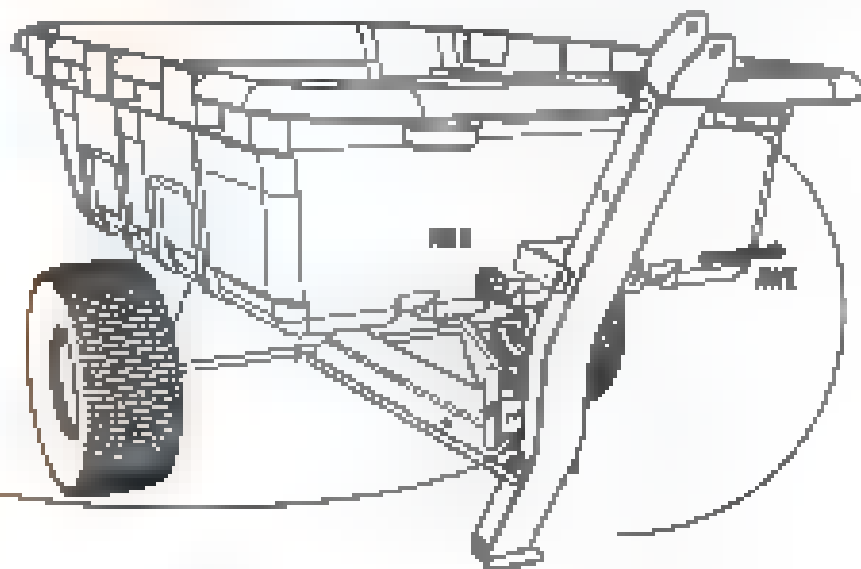

### 3 HANDLE BARS-TO-TONGUE ASSEMBLY

#### HARDWARE REQUIRED

Hardware Available at:

3.



**1/16" (x1)**  
3/8" x 5" Flat Head Bolt



**1/16" (x1)**  
3/8" x 5" Carriage Bolt



**1/16" (x2)**  
Cotter Key



**3/16" (x1)**  
Clevis Pin



**1/16" (x2)**  
3/8" Nylock Nut



**1/16" (x2)**  
Handle Bar  
Spacer



**1/16" (x1)**  
Threaded Knuckle


#### METAL PARTS REQUIRED

Parts Available at:



**1/16" (x1)**  
Handle Bars

#### TOOLS REQUIRED




**1/4" Wrench (x2)**



**Safety Blanket**



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

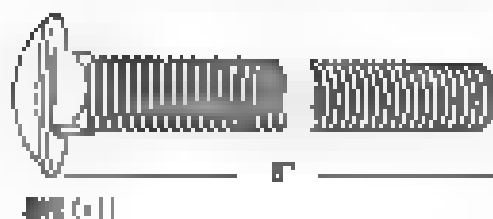


1/2" x 11"



1/2" x 3/4"

SEC 3

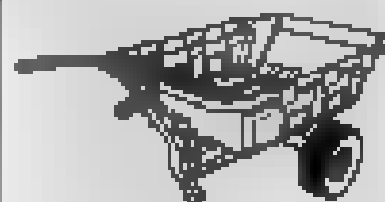


1

SEC

3.1


Place the Needle Bars (NBL) over the Tongue as shown. Insert one (1) 1/2" x 11" Carriage Bolt (CBT) through the upper holes and secure with a Washed Bolt (WB).

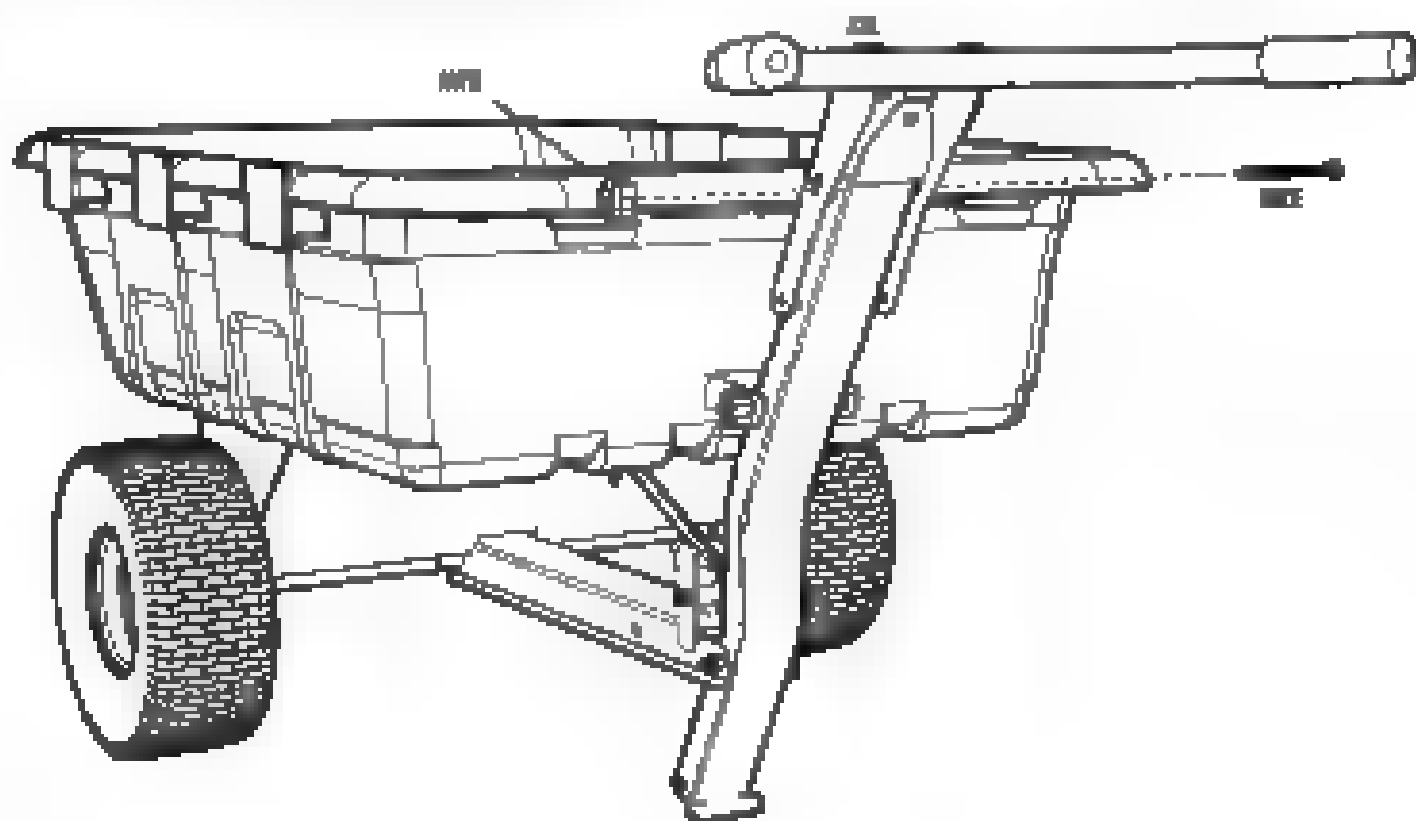



## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

5/16" (L2)

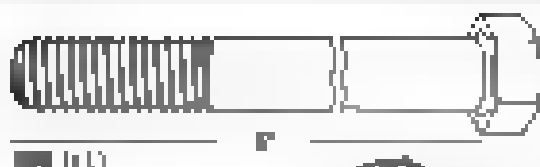


5/16" (L1)

5"




AAA (x1)



BNH (x2)

SEC 3

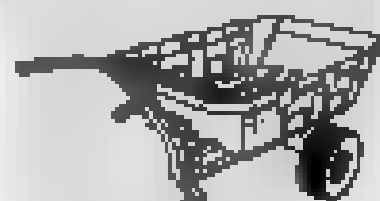


3

SEC

3.2

Insert two (2) Handle Bar Spacers (BNH) between the forks of the Handle Bars and the Tongue. Slide one (1) 5/16" x 5" Hex Head Bolt (L2) through the Handle Bar forks, Spacers and Tongue. Secure Handle Bars to Front Tongue with one (1) 5/16" Nylock Nut (AAA).

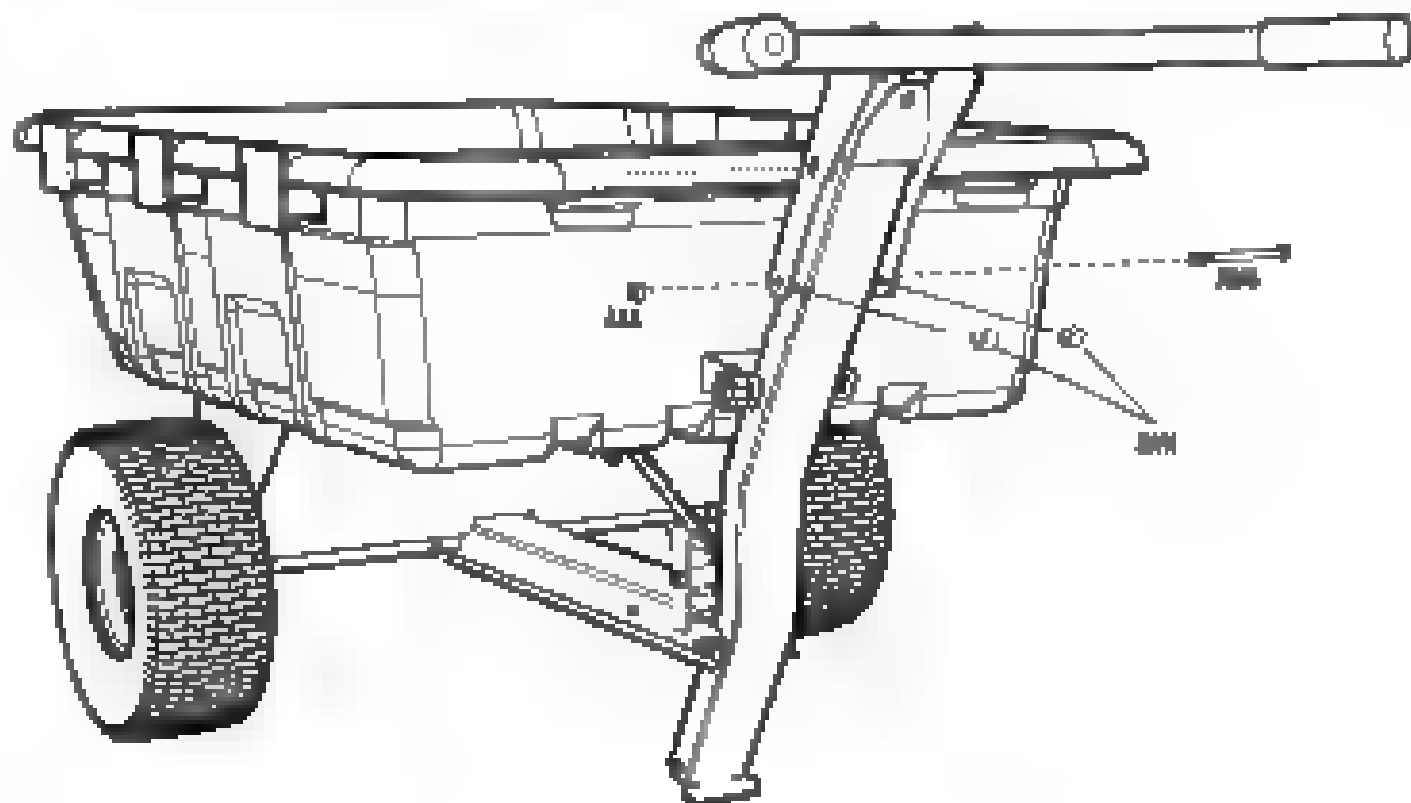




## TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC

3



LOCKING PLIERS

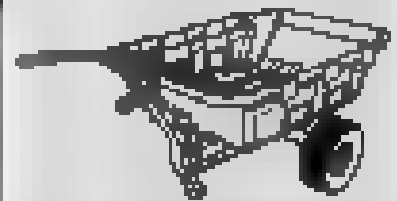


1

STC

3.3

Insert Clevis Pin **LNND** through the hole at the top of the Tongue and secure it with a **Double Ray** **LNNT**.

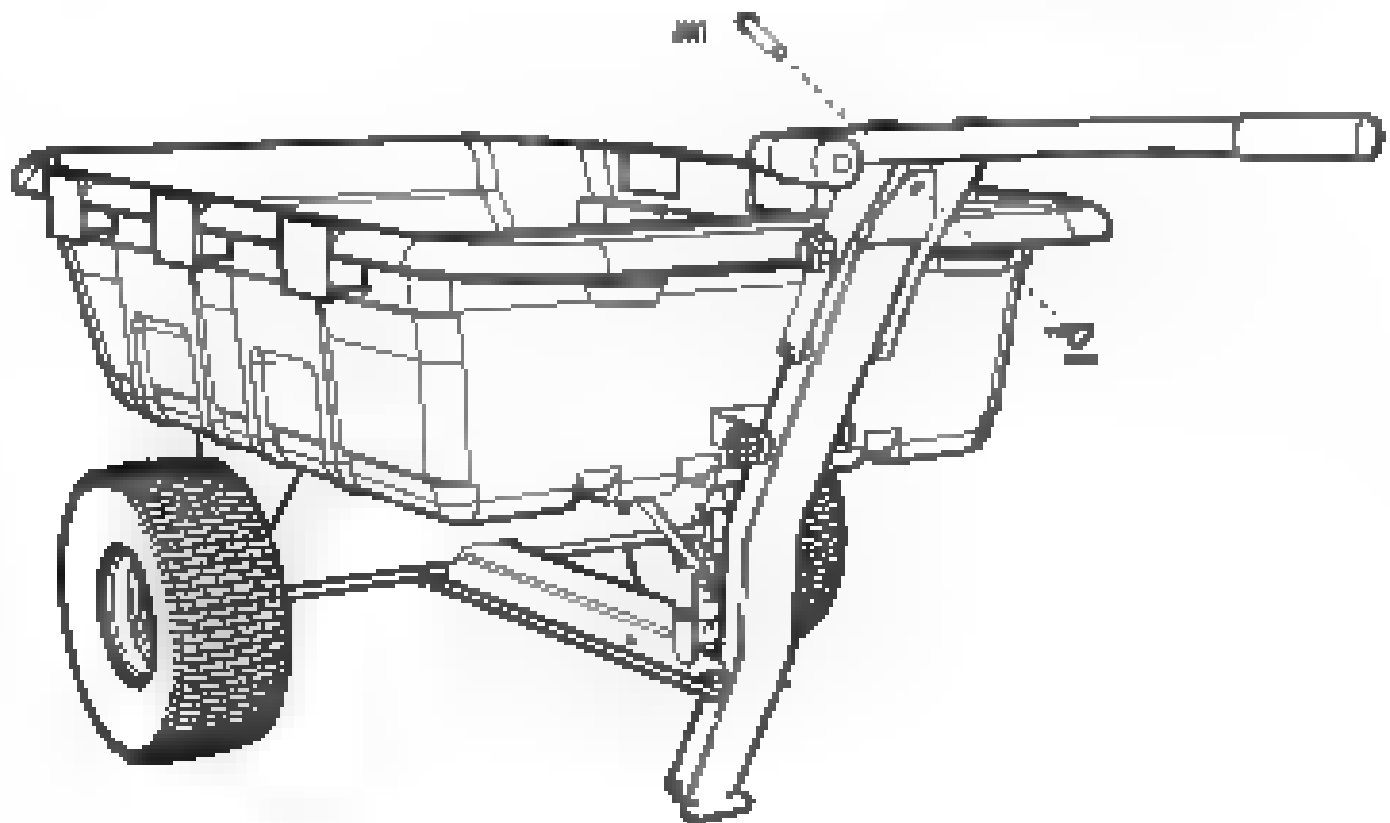


## 4 YARD CART DEPLOYMENT

### YARD CART DEPLOYMENT

SEC

4.1


Unscrew Front Tongue-Handle Bar Assembly and remove Carriage Bolt

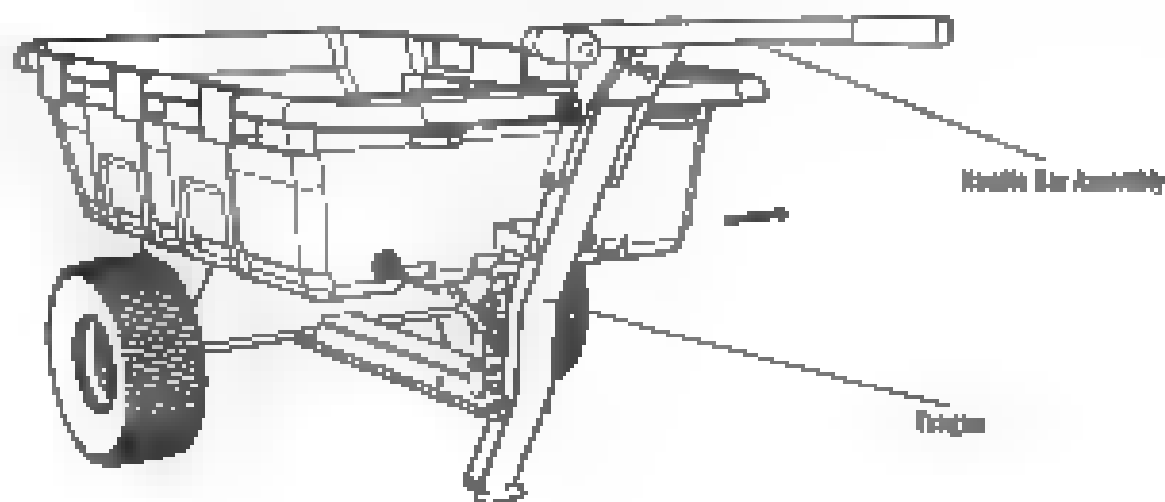

SEC

4.2

Rotate Front Tongue-Handle Bar Assembly down until holes at the bottom of the Front Tongue line up with holes in Axle Weldment, and re-fasten the Carriage Bolt through holes in Tongue and Axle Weldment and secure with Threaded Nut

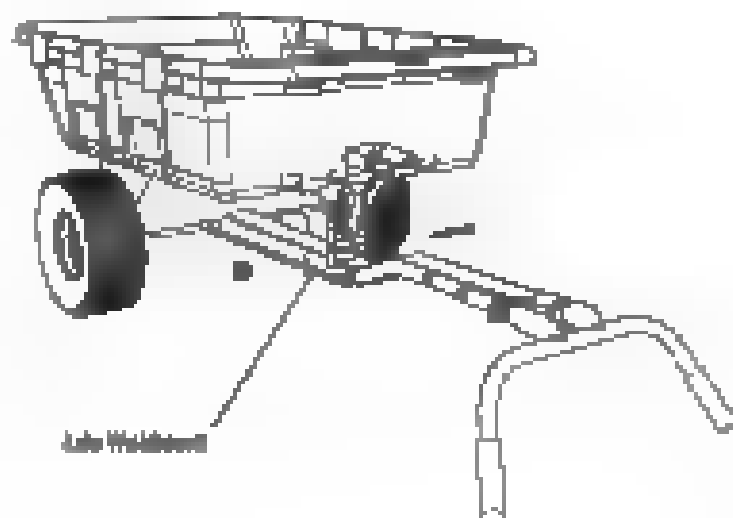


**CAUTION**  
Watch for pinch points as serious injury could occur

## YARD CART DEPLOYMENT

SEC

4.3


Insert Handle Bar Assembly and Remove Carriage Bolt

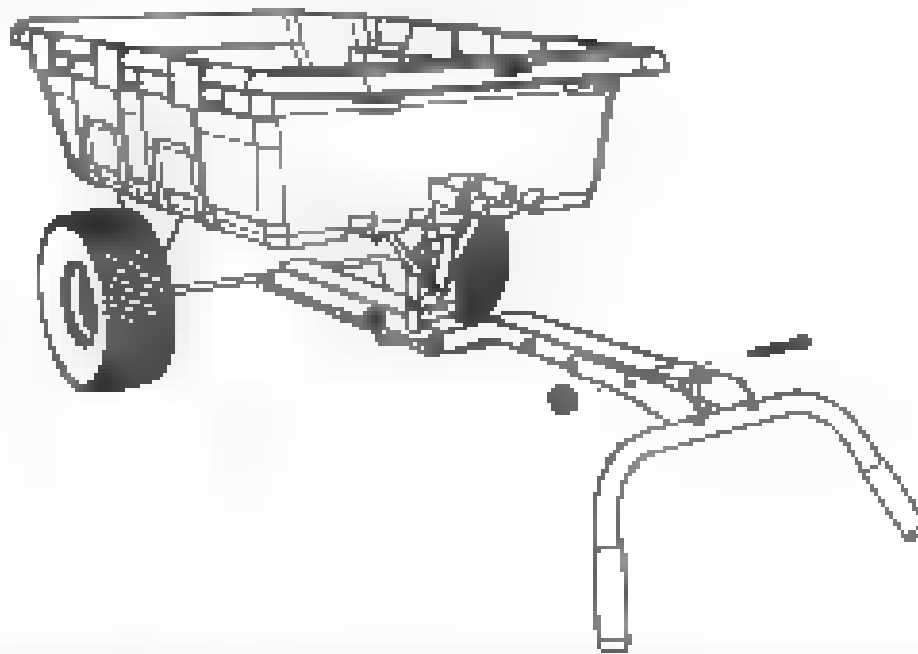

SEC

4.4

Rotate Handle Bar Assembly backwards until legs are resting up with legs in Tongues and insert the Carriage Bolt through holes in Forks and Tongues and secure with Threaded Knob.

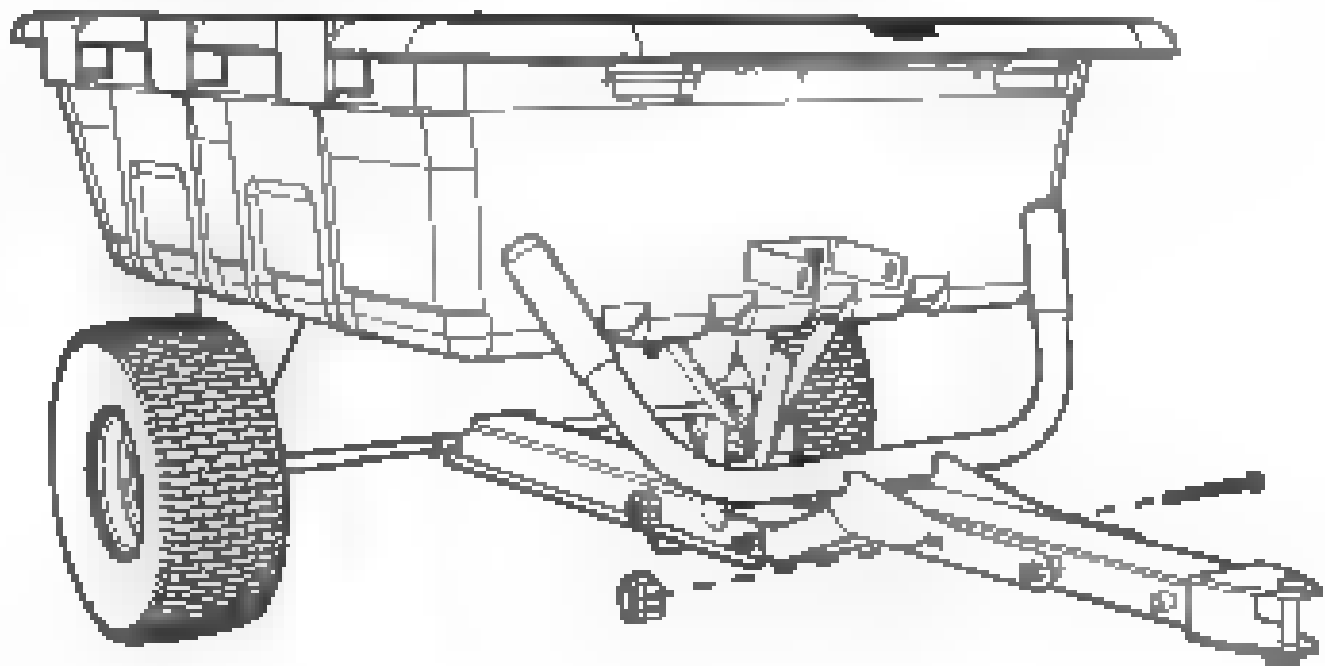


## YARD CART DEPLOYMENT

SEC

4.5


Connect the Yard Cart to the Tow Vehicle by inserting the Draw Pin through the Tongue and Tow Vehicle. Secure the Yard Cart to the Tow Vehicle with the Collar Key.

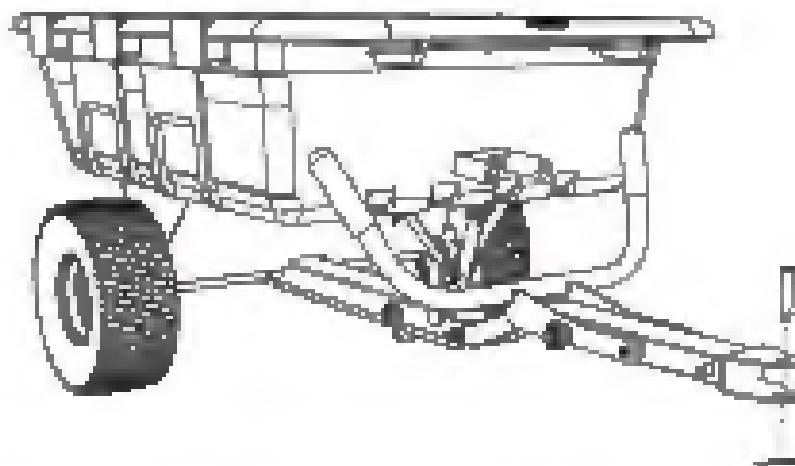

SEC

4.6

To unfold contents of cart, hold Tow with one hand, pull back on the Latch Handle, and carefully tilt the Tow backwards.

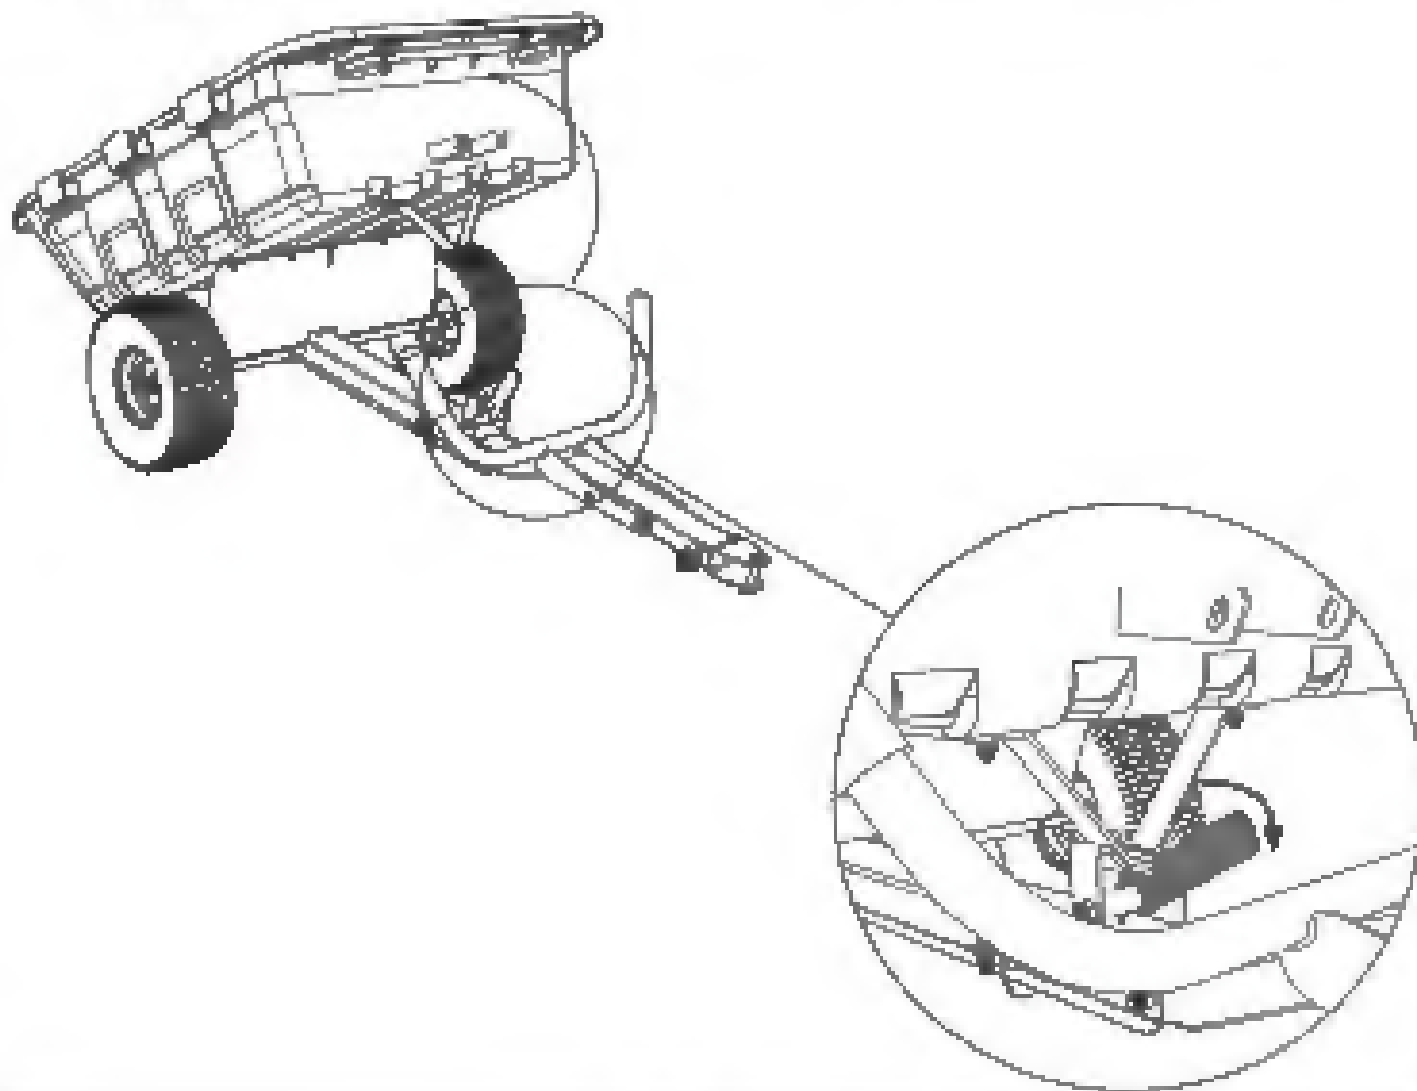


## 5 BUILD WALL EXTENSIONS

### BUILD WALL EXTENSIONS

#### SEC

#### 5.1

You can insert standard 1" x 2" (about 3/4" x 1 1/2") boards into the six slots on the sides of the Top to extend the walls of the Yard Cart and hold a higher stack of debris.

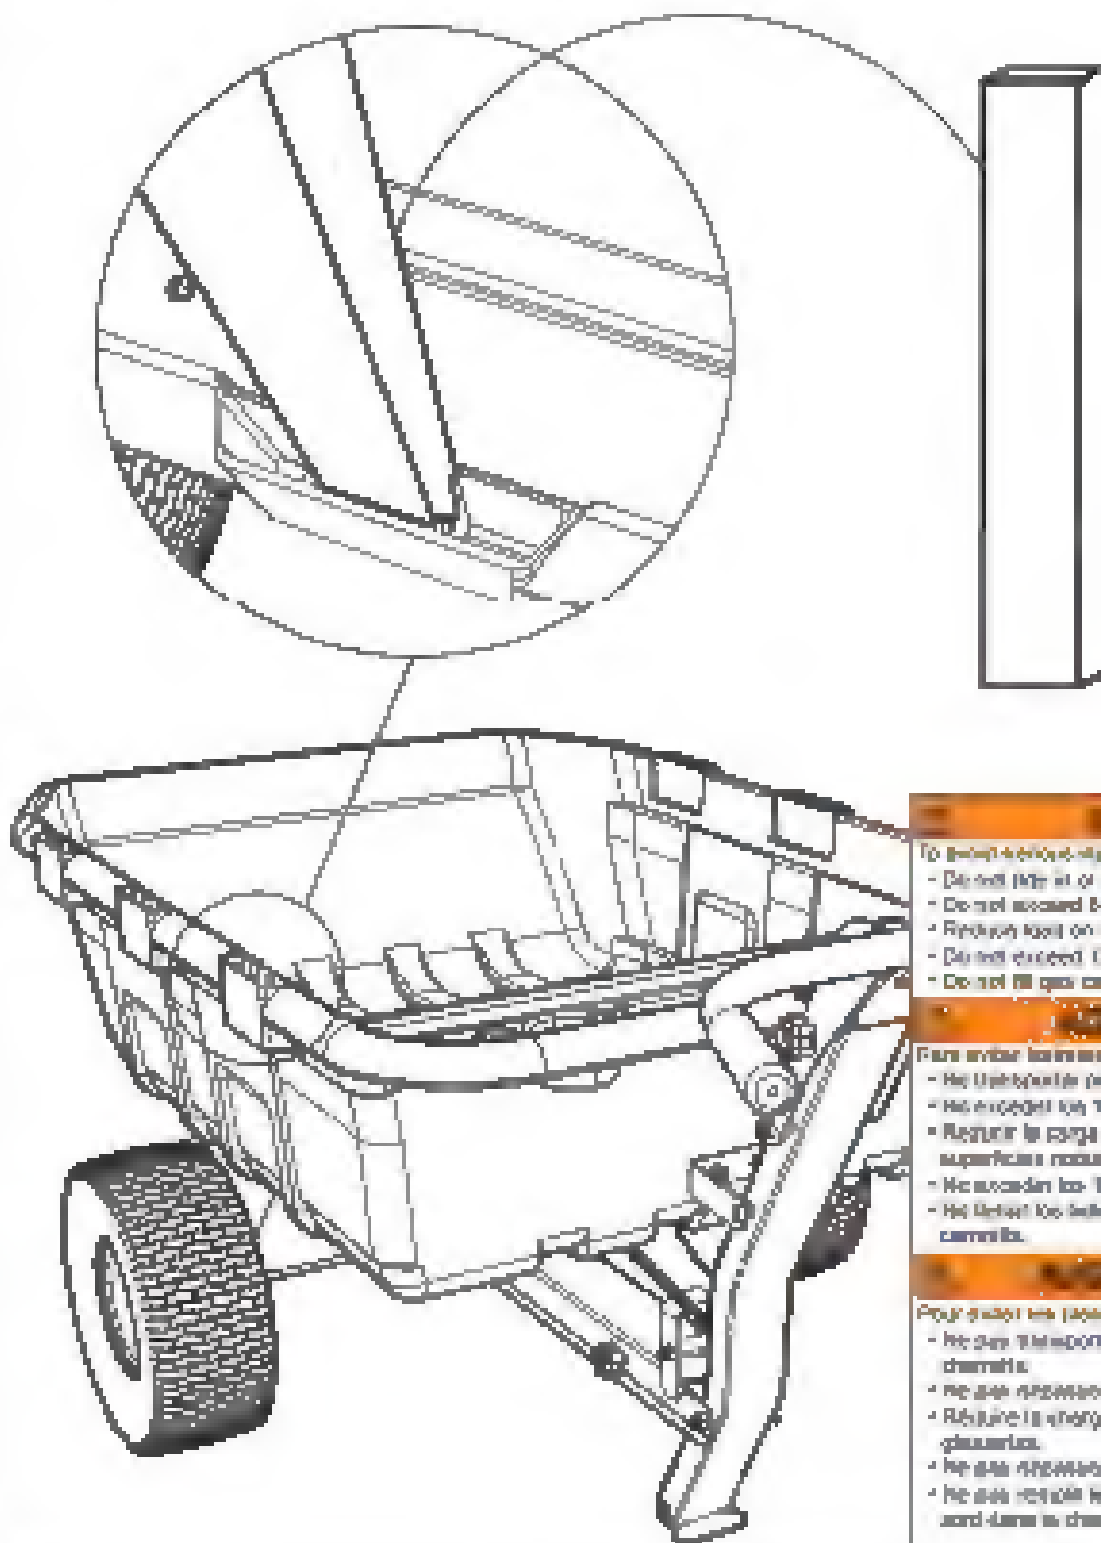

#### Pour éviter les accidents

- Ne mettez rien au-dessus du chariot.
- Ne mettez pas plus de 550 lbs.
- Réduisez la charge sur des surfaces instables.
- Ne mettez pas de débris dans le chariot.
- Ne mettez pas de débris dans le chariot.

#### Pour éviter les accidents graves

- Ne transportez pas de débris dans le chariot.
- Ne mettez pas plus de 1050 lbs.
- Réduisez la charge de la camionnette en roulant sur des surfaces instables.
- Ne mettez pas plus de 10,5 km/h (65 mph).
- Ne mettez pas de débris dans le chariot.

#### Pour éviter les accidents graves

- Ne transportez pas de débris dans le chariot.
- Ne mettez pas plus de 1430 kg (3150 lbs).
- Réduisez la charge sur les côtés du véhicule lorsque vous roulez.
- Ne mettez pas plus de 16 km/h (10 mph).
- Ne mettez pas de débris dans le chariot.

81034754

## WARRANTY INFORMATION

### 5-YEAR LIMITED FACTORY WARRANTY

**THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.**

1. Lifetime yard carts are warranted to the original purchaser to be free from defects in material and workmanship for a period of five years from the date of original retail purchase. The word "defects" is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration, or accident. This warranty does not cover damage caused by vandalism, rusting, "acts of nature" or any other event beyond the control of the manufacturer.
2. The tires, wheels, and axle included with the yard cart are not covered by this 5 year limited factory warranty, but are covered by separate 1 year warranty.
3. This warranty is nontransferable and is expressly limited to the repair or replacement of part(s) which may be determined upon inspection by the manufacturer to be defective in material or workmanship. Shipping charges to and from the factory as well as labor costs are not covered and are the responsibility of the purchaser.
4. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use, improper loading or overloading, installation of improper equipment, or improper towing will void this warranty.
5. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in the yard cart, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use. Neither Lifetime Products, Inc. nor any representative assumes any other liability in connection with this product.

**ALL WARRANTY CLAIMS MUST BE ACCOMPANIED BY A SALES RECEIPT.**

**REPORT PRODUCT DEFECTS IN WRITING TO:**

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010  
or call (800) 225-3665 M-F 7 a.m. to 5 p.m. MST.

**Please include your dated sales receipt and photographs of damaged parts.**

**To register the product, visit our Web site at [www.lifetime.com](http://www.lifetime.com)**

**LIFETIME**

[www.lifetime.com](http://www.lifetime.com)

©2004 Lifetime Products, Inc.

PO Box 160010 • Clearfield Campus, Bldg. D-11 Clearfield, Utah 84016-0010  
T 800-225-3665 • F 801-736-1817

*ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS*

---

*To purchase accessories or other Lifetime Products, visit us at:*

***www.lifetime.com***

***Or call: 1-800-424-3865***

---

